



## Crane rail track KBS

Flat and square bright steel solutions for your crane

Quick assembly  
w/o straightening  
(Straightness max. 1 mm/m)

Quick assembly

Grease free material

Good weldability

First class driving characteristics

Higher running performance of the wheels due to rounded edges

Reduction of the running-in time of the wheels

Short delivery time for 17 standard dimensions



# ANDERNACH & BLECK

Bright steel is our DNA



## Product features


Length:	min. 6000 mm
Deviation of straightness:	max. 1 mm/m
Weldability:	similar to S355 max. CEV 0,47
Tolerance:	IT11 ( $\pm$ possible)

## Available dimensions e.g.:


50x30 mm
50x40 mm
60x40 mm
60x60 mm
70x70 mm

Your dimension is not in the list?  
Please contact us.

Rounded Edges

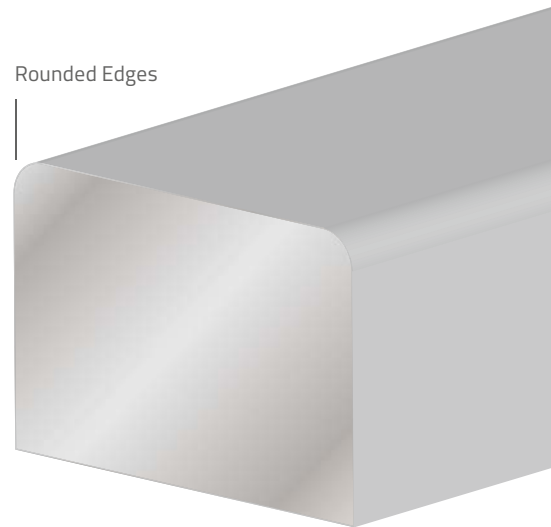

## Also with optional inclined joint available\*

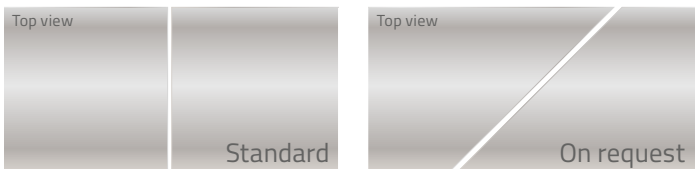

## Your advantages at a glance:

- Time savings during installation due to finish shot-blasted and straightened material.
- Degreasing of the rails to prevent wheel slippage is not required.
- The rails allow immediate smooth running of the wheelsets, shortened running-in time of the wheels.
- Rounded edges increase the durability of the wheelsets.
- Short delivery times for standard dimensions.
- Special dimensions are available on request.

09/2022 | 100 | All information without guarantee of completeness and correctness. All technical changes reserved.